


Fully Automatic Carton sealer

T-4000/4200

For uniform Carton sizes



Crank Handle adjustment for carton size

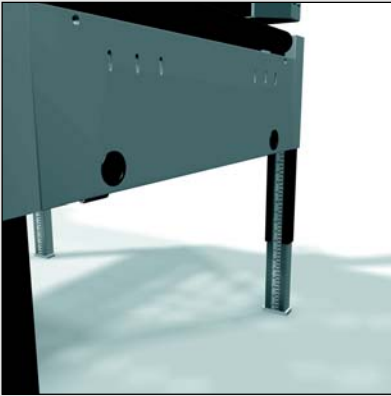


Tape measure on legs for easy and precise working height adjustment



Automatic flap folding



T-4200 Maxi with high pillars for handling of large cartons

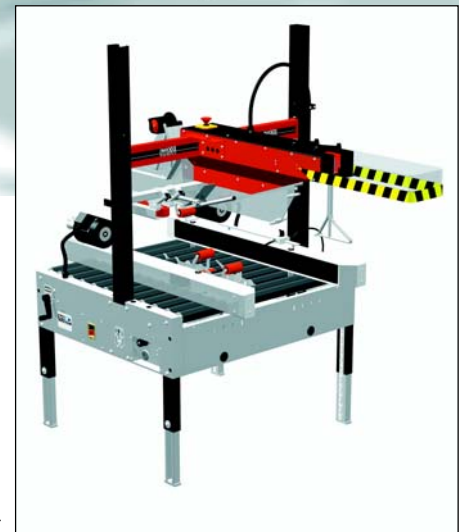

T-4000/4200

- Carton sealer for the closure of uniform carton sizes in batches.
- Automatic flap folding.
- Easy and precise manual adjustment for different carton sizes.
- Extensive accessory programme from the SOCO SYSTEM CON-30 conveyor system - such as infeed and outfeed conveyor modules, packaging tables, rotary tables etc.

Comprehensive Programme

The T-4000 series forms only a small part of a comprehensive range of carton sealers and conveyor systems.

Ask for our main catalogue.

Model T-4000 5-5-9



Model T-4200 5-5-9




Model T-4000 5-8-9



Model T-4200 5-8-9



Model T-4200 7-8-9

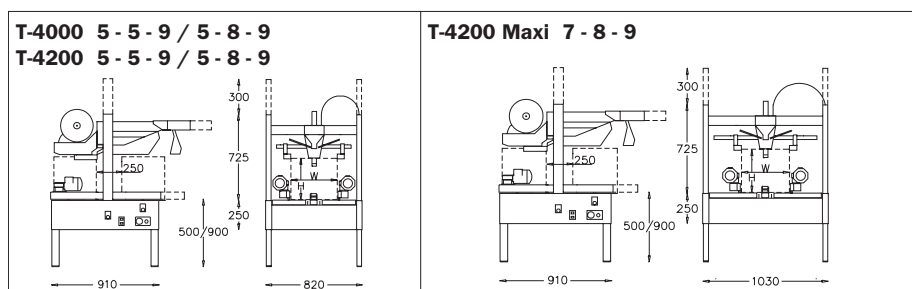

Data	Carton Dimensions*			Tape overlap	Dispenser width			Capacity*	Side drives				Shipping carton dimensions			Weight kg		
	Model	Length	Width		Height	70	50		25-30	38-50	50-75	50	80	200/400	200/400		Length	Width
T-4000 5-5-9	Max. 550 Min. 200	460	120	470 100	●	●	●	●	●	Max. 18/min.	●	●	●	●	1410	870	1200	165
T-4000 5-8-9	Max. 550 Min. 200	460	120	770 100	●	●	●	●	●	Max. 18/min.	●	●	●	●	1410	870	1500	168
T-4200 5-5-9	Max. 750 Min. 200	460	120	470 100	●	●	●	●	●	Max. 18/min.	●	●	●	●	1410	1080	1200	170
T-4200 5-8-9	Max. 750 Min. 200	460	120	770 100	●	●	●	●	●	Max. 18/min.	●	●	●	●	1410	1080	1500	173
T-4200 Maxi 7-8-9	Max. 750 Min. 200	710	170	670 150	●	●	●	●	●	Max. 18/min	●	●	●	●	1410	1080	1500	175
General	Electrical equipment: 3x230/400 V 50-60 Hz or 3x415/460 V 50-60 Hz Connected load 0,3 Kw Other specifications available on demand.						<p>Max. 0.6 l at 6 bar per carton</p>											

- Standard
- Optional

All measurements are in mm.
Right to alter specifications reserved.

* Depending on the quality, construction and size of the box.

SOCO SYSTEM A/S
Helgeshøj Allé 16 D - 2630 Taastrup . Denmark
Tel. +45 43 52 55 66 . Fax +45 43 52 81 16
info@socosystem.com
www.socosystem.com