



Semi Automatic Carton Sealer with Automatic Top Closure

TT-10
For Uniform
Cartons

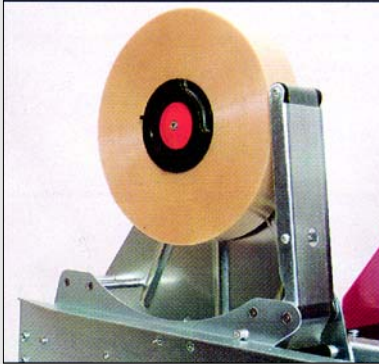

High quality tape dispensers

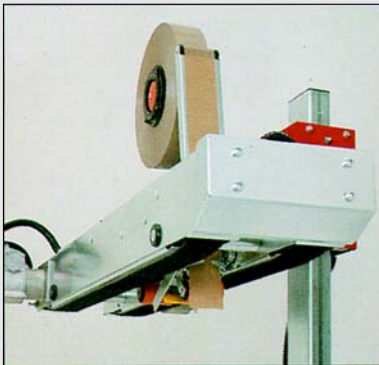

Double drive belts




Efficient brush system for any tape overlap



SOCO
SYSTEM

Carton sealer for top sealing of low cardboard cartons.

Manual height and width adjustment.

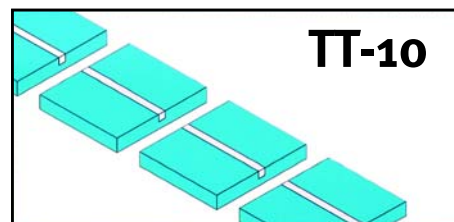

TT-10

Specially designed to handle primarily flat items such as graphics, mirrors, cabinet doors, half-knock-down furniture, computer lists etc. requiring top taping only. Many items such as folders are ideal for this special purpose machine.

Basic models

The TT-10 top sealer is available in two basic version, TT-10 and TT-10 Maxi. (See table).

Top dispenser

Modified dispenser from SOCOs complete programme. Available for tape widths 38-50 mm.

Double drive belts

Double drive belts at top is an effective system also for comparatively heavy products handled in the paper and furniture industries. As an extra precaution, the top drive is fitted with an inlet security to stop the machine in case of fingers trapped between the carton and the top drive.

Efficient brush system


SOCO SYSTEM's unique brush system in the roller table to ensure that the tape overlap is brushed down onto the underside of the carton.

TT-10 Top and bottom sealer

The brush unit may be removed without the use of tools and replaced by a standard dispenser. In this way, the TT-10 can be used as a top and bottom sealer for traditional cartons.

Side guides.

The compact side guide arrangement makes it possible to seal cartons which are only a few millimeters high. At the same time, it is designed to handle very heavy cartons.

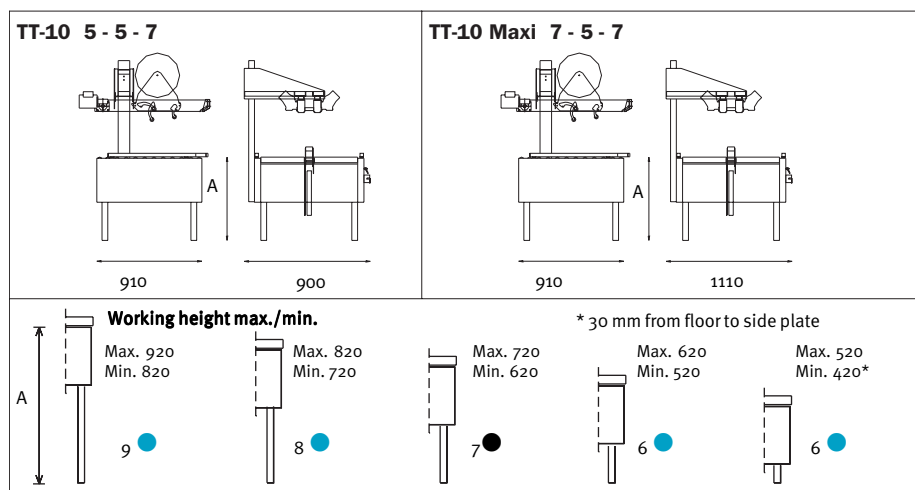

Data	Carton Dimensions*			Tape overlap	Dispenser width			Capacity*	Side drives	Shipping carton dimensions			Weight KG.
	Length	Width	Height		70	50	25-30			38-50	50-75	Length	
Model													
TT-10 5-5-7	Max. ∞ Min.	670	200	●	●	●	●	Max. 30/min.	Double drive belt at top	1440	950	1440	165
TT-10 Maxi 7-5-7	Max. ∞ Min.	880	200	●	●	●	●	Max. 30/min.	Double drive belt at top	1440	1170	1440	170
General	Electrical equipment: 3x230/400 V 50-60 Hz or 3x415/460 V 50-60 Hz Connected load 0,3 Kw Other specifications available on demand.			Taperoller dimensions: Max. 385			 Max 0.5 l at 6 bar per carton						

- Standard
- Optional

All measurements are in mm.
Right to alter specifications reserved.

* Depending on the quality, construction and size of the box.

SOCO SYSTEM A/S

Helgeshøj Allé 16 D . DK-2630 Taastrup
Tel. +45 43 52 55 66 . Fax +453 52 81 16
info@socosystem.com
www.socosystem.com