


Case erector

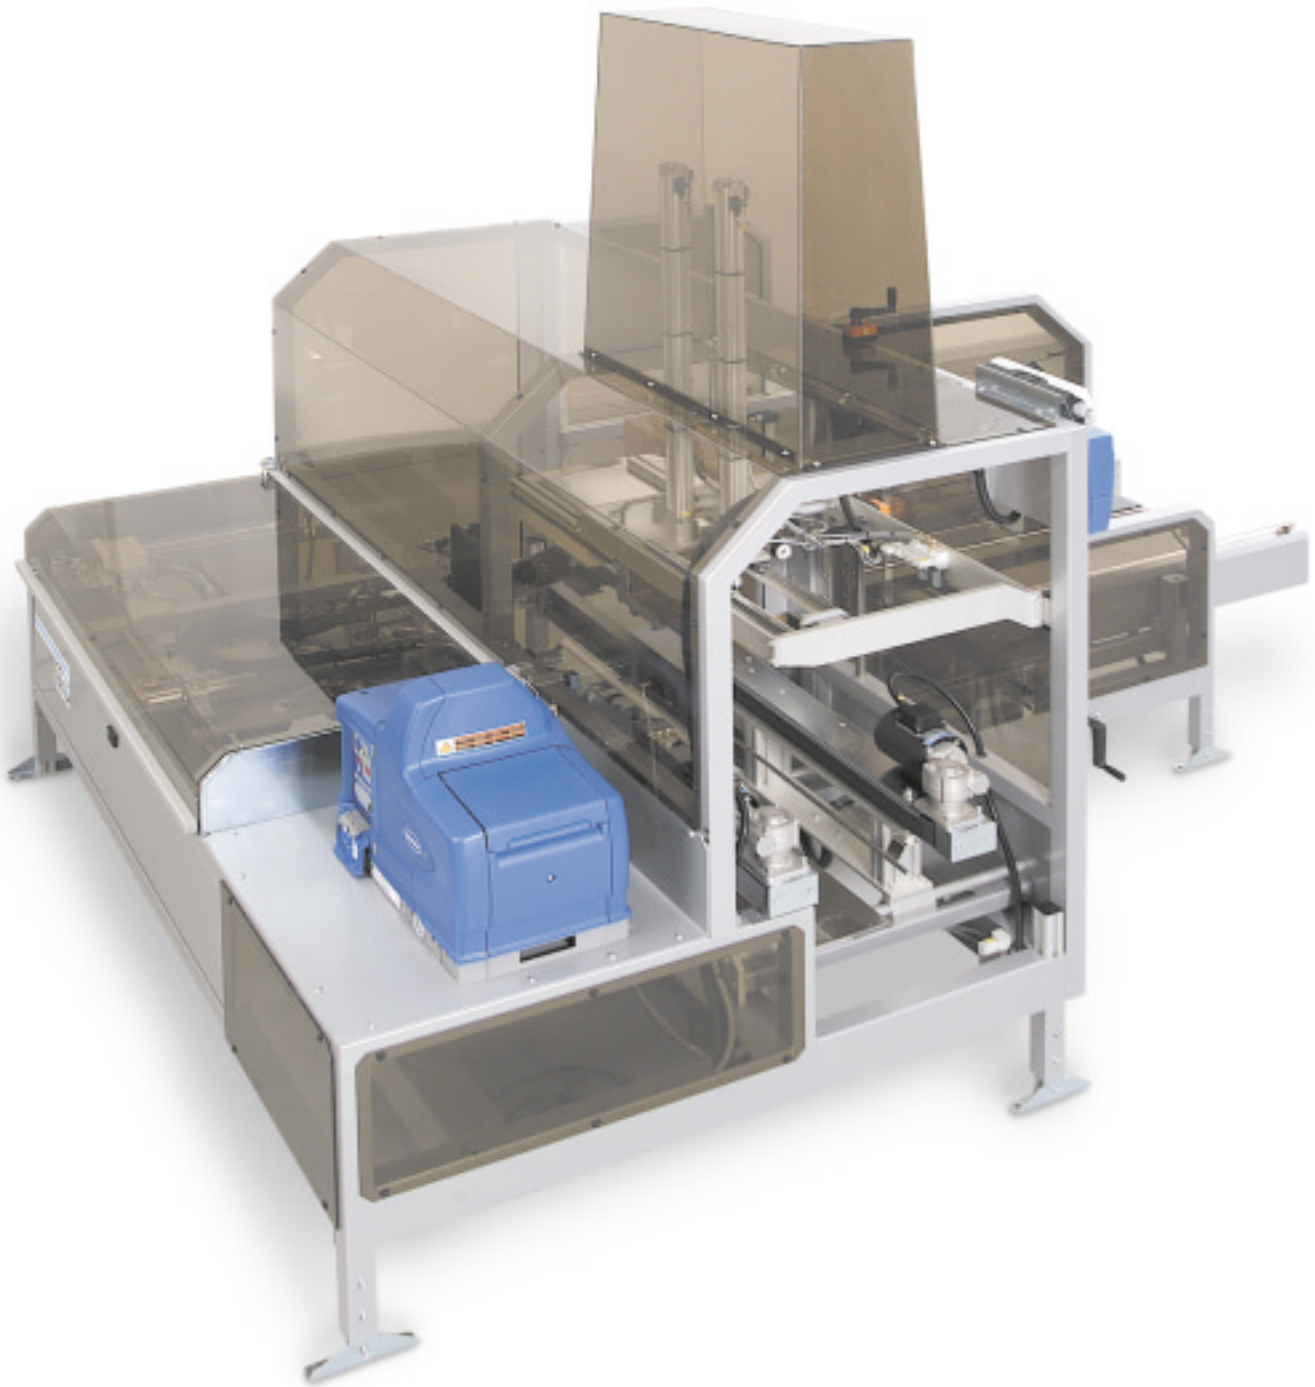

SOCO Pack AHS

**Case erector
with integrated
hotmelt bottom
sealing**

**EFFICIENT BOTTOM FLAP FOLDING AND GLUE
APPLICATION**



**POWERED BLANK MAGAZINE – EASY TO FILL
EVEN WHILE IN OPERATION**



Technical data and specifications

BLANK CONSTRUCTION

Fefco 0201. Other constructions available on demand.

BLANK MATERIAL

Corrugated board, thickness 2,0 – 7,0 mm (a- b- c- b/c-flute).

BLANK MAGAZINE CAPACITY

Approx. 190 pcs in b-flute.

SUCTION PLATE

Interchangeable suction plate.

HOTMELT EQUIPMENT

As standard, Nordson Problue 4 kg.

POWER

4,5 kW, 3x400/230 V + PE, 50/60 Hz.

AIR CONSUMPTION

42 l free air/cycle, min 600 kPa, 1/2" connection.

NOISE LEVEL

Max 74 dBa.

COLOUR

As standard, the case erector is supplied in RAL-9006 (light grey).

QUEUE CONTROL

Queue control is standard.


OPTIONAL EXTRAS

Alarm for magazine filling, glue alarm, stainless steel version, colour, castors, other hotmelt equipment.

The SOCO Pack AHS is a high speed, fully automatic case erector with integrated hotmelt bottom sealer.

The machine is easy to operate and easy to adjust for different case sizes by simply turning a handle. Its compact design allows easy installation into a new or existing production line.

The SOCO Pack AHS is the perfect start of the packaging line and forms part of SOCO SYSTEM's total End-of-Line solutions.

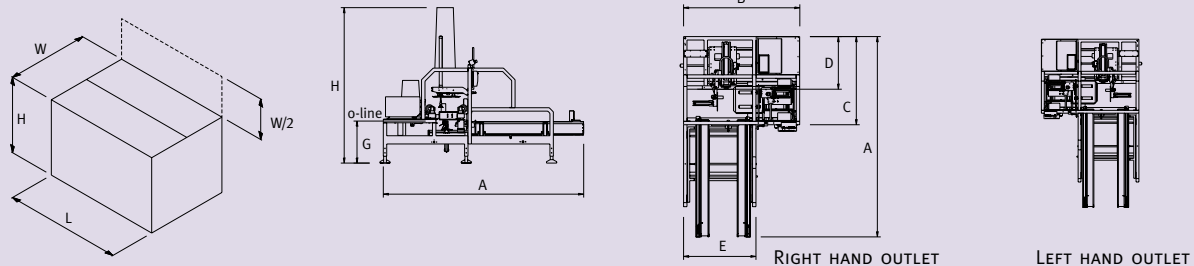

MODEL	DATA	CASE SIZES IN MM			CAPACITY CASES/MIN	MACHINE DIMENSION IN MM						
		L	W	H		A	B	C	D	E	G	H
BE-2200 AHS	MIN	200	130	100	15-16*	2950	1800	1275	795	1060	560/940	2055/2445
	MAX	420	300	450								
BE-2300 AHS	MIN	300	200	130	12-14*	3085	2300	1515	870	1360	610/960	2405/2755
	MAX	620	400	550								

*DEPENDING ON THE QUALITY, CONSTRUCTION AND SIZE OF THE BOX

RIGHT TO ALTER SPECIFICATIONS RESERVED.



Head office:
SOCO SYSTEM A/S
Helgeshøj Allé 16D
2630 Taastrup
Denmark

Tel.: +45 43 52 55 66
Fax: +45 43 52 81 16
Email: info@socosystem.com
Web: www.socosystem.com