




Semi Automatic Carton Sealer with Automatic Side Closure

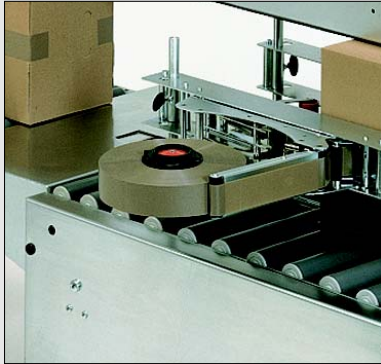

High quality tape dispensers

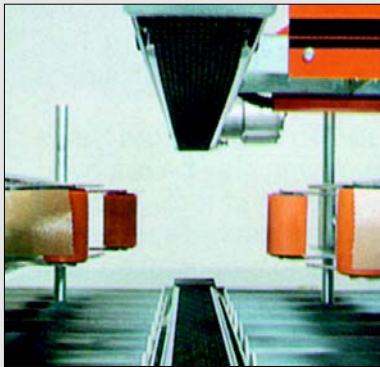

Efficient drive belts

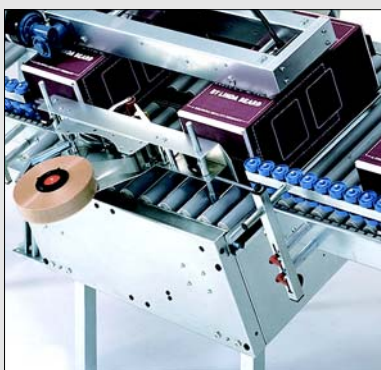


Tilted legs for an efficient solution



ST-10
For Uniform
Cartons

Carton sealer for top and bottom sealing of carton lying down.

Manual height and width adjustment.

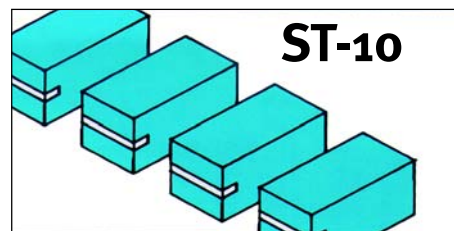

ST-10

Side sealer specially designed for pack stations where the cartons are filled from the end and sealed lying down. The ST-10 is also suitable for operation on automatic packaging lines with case packers.

All the machine modules are based on the well-known technology characterizing the rest of SOCO SYSTEM's programme. The modules are simply composed differently.

Basic models

The ST-10 is available in two standard versions, ST-10 and ST-10 Maxi. (See table).

Special purpose machine

The ST-10 is designed for a multitude of special applications. The standard machine is easily modified to seal cartons which differ in size from standard.

The tape dispenser for side sealing

The tape dispenser for the ST-10 are SOCO SYSTEM's standard dispensers modified by means of an adapter system. The quick-lock system makes it easy to replace the dispensers

Drive belts

The ST-10 is fitted with drive belts at top and bottom. SOCO SYSTEM's standard side drives simply used in a different way.

Ideal Pack Station for long packages.

Tilted legs ensure an ergonomically correct pack station. Where for instance wall paper rolls, graphics in cardboard bags or other tubular packages are handled, tilted legs are the ideal solution and will ensure careful product handling.

ST-10 5 - 5 - 7		ST-10 Maxi 7 - 5 - 7							
Working height max./min. Max. 920 Min. 820		* 30 mm from floor to side plate Max. 820 Min. 720							
Data	Carton Dimensions*			Tape overlap	Dispenser width	Capacity*	Shipping carton dimensions	Weight KG.	
	Length	Width	Height	70 50	25-30 38-50 50-75	Max. 30/min.			
Model									
ST-10 5 - 5 - 7	Max. 530 Min. 125	∞	200 50	● ●	● ●	Max. 30/min.	Single drive belt at top and bottom	1440 950 1440 165	
ST-10 Maxi 7 - 5 - 7	Max. 740 Min. 200	∞	200 50	● ●	● ●	Max. 30/min.	Double drive belt at top and single at bottom	1440 1170 1440 170	
General	Electrical equipment: 3x230/400 V 50-60 Hz or 3x415/460 V 50-60 Hz Connected load 0,3 Kw Other specifications available on demand.			Taperoller dimensions: 					

- Standard
- Optional

All measurements are in mm.
Right to alter specifications reserved.

* Depending on the quality, construction and size of the box.

SOCO SYSTEM A/S

Helgeshøj Allé 16 D . DK-2630 Taastrup
Tel. +45 43 52 55 66 . Fax +45 43 52 81 16
info@socosystem.com
www.socosystem.com