


Uniform case sizes
Manual adjustment for case size

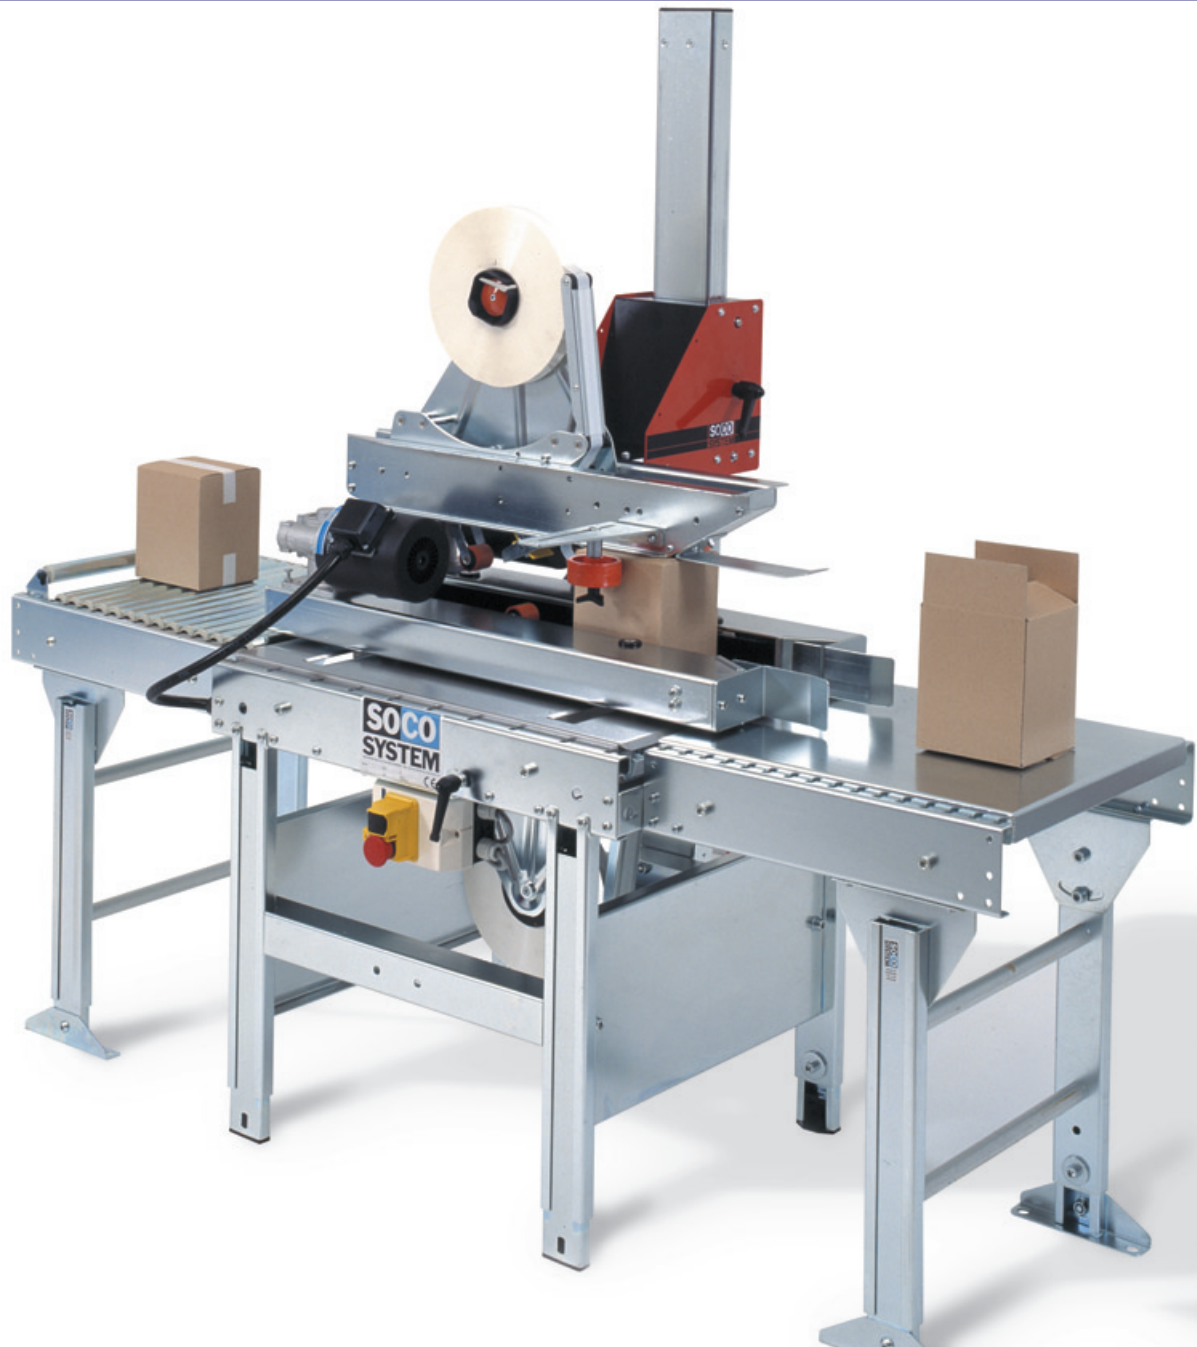

T-100 Mini Mini

For small cases

**THE SIDE DRIVES AND DISPENSER
ASSURE PERFECT HANDLING OF SMALL
AND LIGHT PRODUCTS.**

**THE SPECIAL INFEED CONVEYOR
ASSURES A GENTLE AND SECURE INFEED.**



Semi automatic top and bottom closure



THE CASE SEALER FOR SMALL CASES.

ESSENTIAL PART OF THE PACKING STATION IN MANY INDUSTRIES E.G. PHARMACEUTICAL, FOOD, ELECTRICAL COMPONENTS, TOILETRIES.


The T-100 Mini Mini is the ideal case sealer for small cases. The machine is designed to assure a safe and gentle tape closure of small cases, without any risk of jammed fingers.

- Easy to adjust for different case sizes
- Easy tape and dispenser replacement
- Very compact design
- Easy to maintain with low maintenance and sparepart costs
- Wide range of accessory equipment, e.g. braked castors, in-feed and outfeed conveyors.
- Electro-zink finish

T-100 MINI MINI 3-5-9

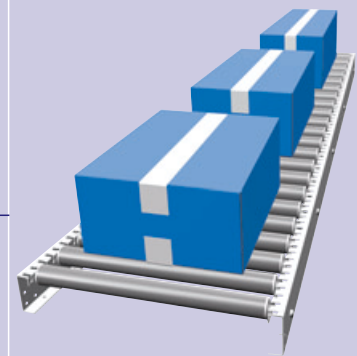


WORKING HEIGHT MAX./MIN.



DATA	CASE DIMENSIONS IN MM*			TAPE OVERLAP IN MM		TAPE WIDTH IN MM				CAPACITY*	SIDE GUIDES				KG		
MODEL	L	W	H	70	50	25-30	38-50	50-75	65-100	Max. 30/MIN.	50	80	+200/400	50	80	+200/400	
T-100 MINI MINI 3-5-9	MAX. ∞	MIN. 350	500		●	●				MAX. 30/MIN.	●						120
TOP SEAL ONLY	MAX. ∞	MIN. 350	500														
			60-120	80													
TOP SEAL ONLY	MAX. ∞	MIN. 350	500														
			120	50													

NB! TALL CASES WITH A SMALL FOOTPRINT WILL BE SUBJECT TO TEST. ALSO SMALLER CASES CAN BE SEALED, AGAIN SUBJECT TO TEST.

GENERAL



ELECTRICAL EQUIPMENT
3x230/400 V 50-60 Hz OR
3x415/460 V 50-60 Hz.
CONNECTED LOAD 0,3 kW.
OTHER SPECIFICATIONS AVAILABLE
ON DEMAND

TAPE ROLLER DIMENSIONS

- STANDARD
- OPTIONAL

* DEPENDING ON THE QUALITY, CONSTRUCTION AND SIZE OF THE BOX.
ALL MEASUREMENTS ARE IN MM. RIGHT TO ALTER SPECIFICATIONS RESERVED.



Hovedkontor:
SOCO SYSTEM A/S
Helgeshøj Allé 16D . Postbox 149
DK-2630 Taastrup . Denmark

Tel. +45 43 52 55 66
Fax +45 43 52 81 16
info@socosystem.com
www.socosystem.com