


# Semi Automatic Carton Sealer with Automatic Top and Bottom Closure


**T-100**  
For Uniform  
Cartons



High quality tape dispensers

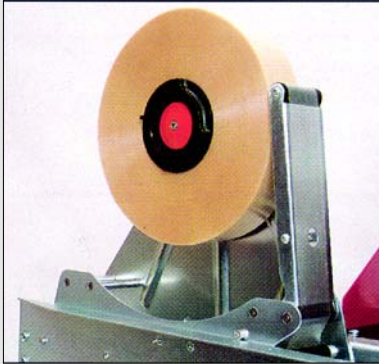


Easy and quick height adjustment

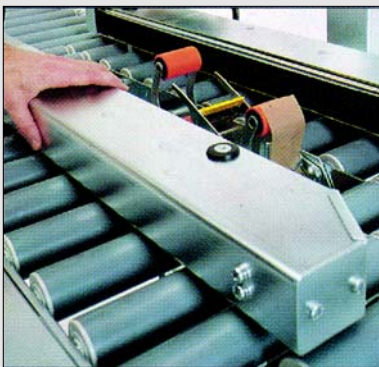

Efficient side drives




T-100 MINI →

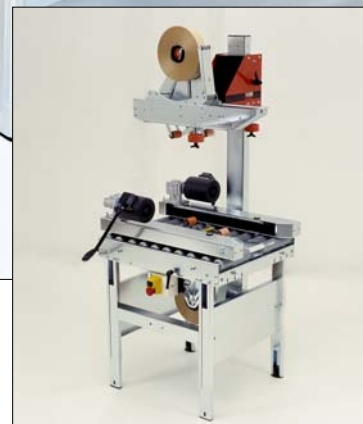

**SOCO**  
**SYSTEM**

# The motorised hand dispenser for simultaneous top and bottom batch sealing of uniform carton sizes. Simple and quick manual adjustment for carton size

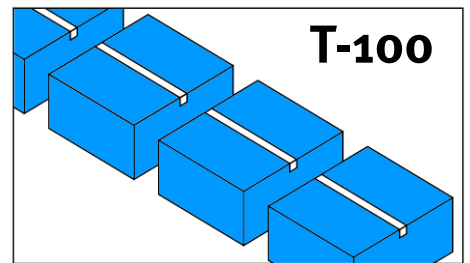

The features of the T-100 series are compact construction, low price, small shipping cartons, simple handling in retail distribution.

All vital parts such as dispensers, belt drives and top assembly are of the well known SOCO top quality. The T-100 Mini is the smallest model in SOCO SYSTEMS range of carton sealing machinery.

## Basic Models

The series comprises two standard models, the T-100 Mini and the T-100. (See table)

The T-100 is available with an electro-zinc or an 18/8 stainless steel finish. In the stainless steel version, all external parts excl. gears, motors, and aluminium parts are made of 18/8 stainless steel. The machine is easy to clean and resistant to damp and moisture.

## High Quality Tape Dispensers


The thumbscrew of the tape roller hub makes tape replacement easy and, at the same time, ensures tape roller stability during the sealing process. Two of SOCO SYSTEM'S dispenser types can be used with the carton sealer in the T-100 series:

- 30 mm dispenser for tape ranging in width from 25-30 mm. The tape overlap is 50 mm.
- 50 mm dispenser for tape ranging in width from 38-50 mm. The tape overlap is either 50 mm or 70 mm.


All of SOCO SYSTEM'S dispensers are fitted with an adjustable hub brake, adjustable tape roller hub, double roller units, knife guards etc.

All the dispensers can be fitted with a monitoring system to supervise the sealing process.

Just some of the features characterizing SOCO SYSTEM'S custom-designed dispensers.

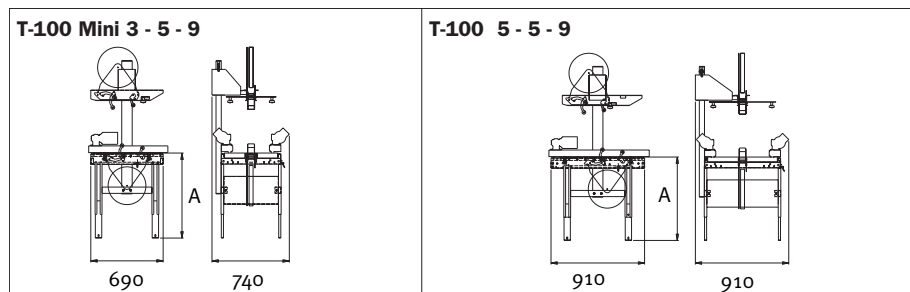

Working height max./min.	
Max. 950 Min. 635	Max. 700 Min. 510

Data	Carton Dimensions**				Tape overlap		Dispenser width			Capacity**	Side drives				Shipping carton dimensions			Weight KG.
	Length	Width	Height		70	50	25-30	38-50	50-75		50	80	50	80	Length	Width	Height	
<b>T-100 Mini 3-5-9</b>	Max. ∞ Min. 105	350	505	110	●	●	●	●		Max. 30/min.	●				1300	800	800	140
<b>T-100 5-5-9</b>	Max. ∞ Min. 90	520	505	90/130*	●	●	●	●		Max. 30/min.	●				1300	800	800	150
<b>General</b>	Electrical equipment: 3x230/400 V 50-60 Hz or 3x415/460 V 50-60 Hz Connected load 0,3 Kw Other specifications available on demand.				Taperoller dimensions: 													

- Standard
- Optional

All measurements are in mm.  
Right to alter specifications reserved.

\* Without and with side pressure rollers.

\*\* Depending on the size, construction and quality of the carton

## SOCO SYSTEM A/S

Helgeshøj Allé 16 D . DK-2630 Taastrup  
Tel. +45 43 52 55 66 . Fax +45 43 52 81 16  
info@socosystem.com  
www.socosystem.com